




TMC
(Internal Antennas)



BAY
(External Antennas)



TRACKING

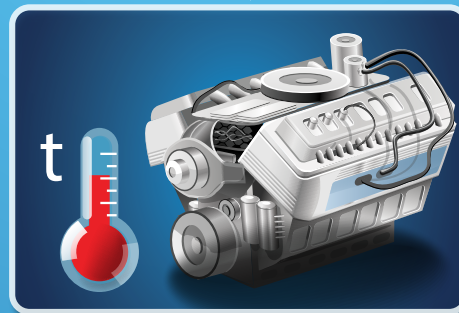

MONITORING



CONTROL

TRACKING

GPS Position Reports, (GeoFencing built-in for depot or theft applications)

MONITORING

- Digital Inputs-2 (One can be programmed to act as a pulse counter)
- Analog Input-0-30 Volt
- Vibration/Movement Detection
- GeoFence monitoring

CONTROL

Digital Output-2

Remotely Controlled or Hard-code change upon Analog Value trip

DATA PLANS

- 30 Days
- 120 Days
- 365 Days
- (Other custom or bespoke plans available)

OVER-THE-AIR Query/Programing

- Query Values over-the-air
- Change configuration over-the-air
- Query configuration for confirmation
- Control Digital Outputs over-the-air

ELECTRICAL

- 10-30 Volt DC Recharging Input

Modes:

- Powered Only,
- Battery Only- 1000 message capability
Powered + Battery

ENVIRONMENTAL

-20° to 60°C

PHYSICAL

- Single Enclosure- IP67 Rating (TMC)
- Embedded Iridium and GPS Antenna
- Size - 5.75x4.75x1.5 in. (14x12x3.8 cm)
- Stand Alone-Tracking Device,
- Accessory Cable supplied for recharging, monitoring, control



Smartphone shown for Size Comparison