



Blue Sky Network


D2000 Flyaway Kit Aviation

Quick Guide

May 2009

Revision A

1) Quick Diagram

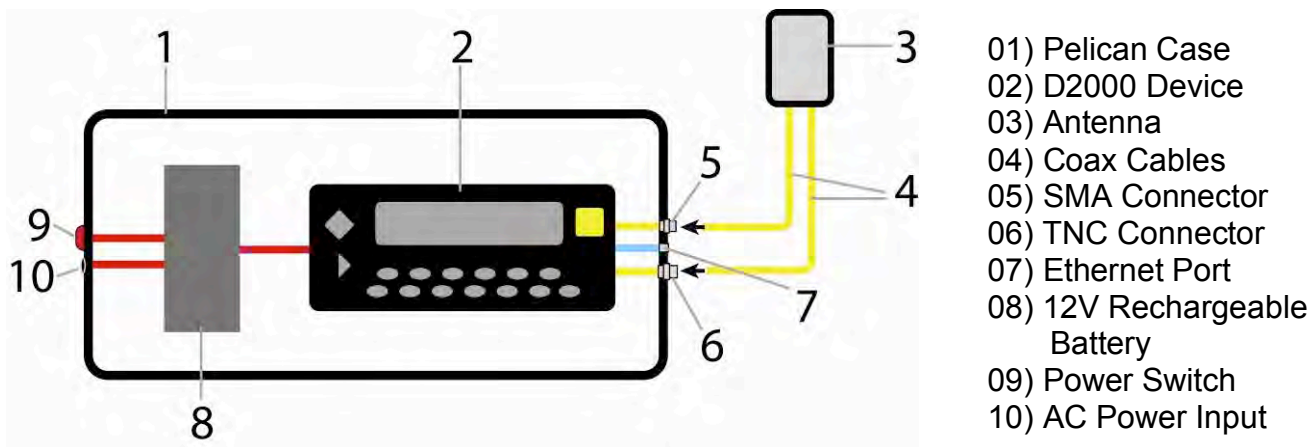

- 01) Pelican Case
- 02) D2000 Device
- 03) Antenna
- 04) Coax Cables
- 05) SMA Connector
- 06) TNC Connector
- 07) Ethernet Port
- 08) 12V Rechargeable Battery
- 09) Power Switch
- 10) AC Power Input

2) Quick Notes

a) Power-up Performance Verification Procedures

- The battery (#8) must be charged for approximately 3.5 hours prior to use.
- Verify that all connectors including antenna, power, and any data cables are securely connected.
- Please note that the acquisition of satellite signal mainly depends upon the placement of the antenna, which should be placed away from other antennas or high power sources and with an unrestricted view of the sky down to eight degrees above the horizon. A windshield suction cup mount is provided for optimum placement on the windshield.
- Remember to start with the vehicle/vessel power off, and the power switch (#9) set in the "Off" position.
- Make sure the vehicle/vessel is in an open area, free from obstruction, with all other electronic radio devices turned off, and proceed to toggle the D2000 power switch to on.
- The screen should first illuminate with an initial display message.
- Then, the backlight on the buttons should illuminate, and within 30 seconds the screen should display the main menu.
- Once the D2000 is turned on, it should take the unit about 2 minutes to acquire GPS and Iridium signals.
- The main menu will display both your Iridium and GPS current signal strength indicators on a scale of 0-5, with 5 being the best. You must see signal strength indicators for both Iridium & GPS before the device will begin reporting.
- Finally, once you see signal strength indicators for both Iridium & GPS it is recommended that you verify the receipt of tracking data using your SkyRouter account. (You may need to contact your SkyRouter administrator.)

b) Please note that the 12V Rechargeable Battery (item 8) is provided with a “Charge Terminal” that is used to charge the battery through its UNIVERSAL SMART CHARGER (included in the package).



For more information, please contact us by e-mailing support@blueskynetwork.com, or by calling the phone number below.



www.blueskynetwork.com

Phone: +1-858-551-3894

Fax: +1-858-225-0794

5333 Mission Center Rd. Suite 220
San Diego, CA 92108